

Technical Data Sheet



Company Overview

Vivasil Paints (M) Sdn Bhd is a manufacturing and supplying paint coating products.

Our company has witnessed accelerated growth and development under the prudent management.

Our company produces the full range of architectural paints construction materials and industrial paints for local market and oversea markets.

Vivasil color products has widened to include specialist and designer products.

For more information:


Email: enquiry@vivasil.com

Facebook:
www.facebook.com/vivasilpaints

Website: www.vivasil.com

Youtube:
<https://youtu.be/E3UaautZ5X4>

Vivasil 565 Acrylic Clear Coat

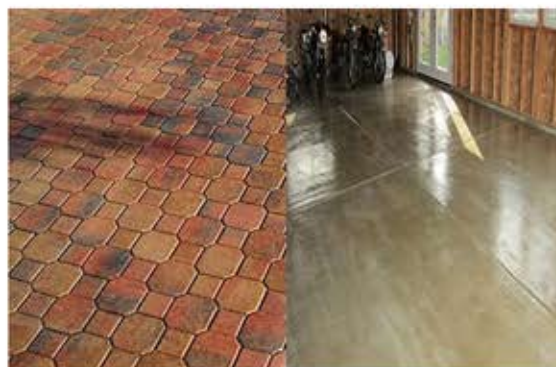

Vivasil 565 Acrylic Clear Coat is a hardwearing Solvent Base clear thermoplastic acrylic paint specially formulated to protect horizontal surfaces such as garage floors, driveways, patios and balconies, paths, pavers and tiles. Solvent based Interior and exterior modified acrylic pave coating which is UV stable, enhances the natural colour of the surface and provides a satin finish. Vivasil 565 Acrylic Clear Coat is a rapid dry coating allowing for the application of multiple coats in single day. Allow the coating turn clear before applying subsequent coats.

PREPARATION OF SURFACE

All the surface must be dry, clean and free from contaminants such as dust, dirt, moss/fungus, oil, grease and ridges etc. Cracks, Chips Voids and Damages should be repaired. good flow out of application marks (e.g. brush-marking) forming a continuous protective film. quick drying

Storage:

Store in closed containers at temperature below 32°C and away from heat sources and sunlight. When properly stored, will remain stable for 12 months from date of delivery.

Resin type.....	Oil-modified Acrylic
Solids content.....	35% (by volume)
Typical film thickness (per coat).....	25 microns (dry) 75 microns (wet)
Theoretical coverage.....	10-12m ² / L @ 25 microns dry film thickness
Touch dry.....	10 - 15 minutes
Hard dry.....	24 hours
Recoating.....	
Gloss.....	Semi Gloss
Colours.....	clear
Shelf life.....	minimum 12 months (in cool, dry conditions)
Airless Spray nozzle size.....	0.33 – 0.38 mm
nozzle pressure.....	2000 – 2500 psi (14 - 17mPa)
volume of thinner.....	up to 10%
Air Spray nozzle size.....	1.6 – 2.0 mm
nozzle pressure.....	45 – 60 psi (300 - 400kPa)
volume of thinner.....	up to 30%
Cleaning solvent	Vivasil Thinner

* If you have any paint related questions please call our customer careline at **06-790 9222**

VIVASIL PAINTS (M) SDN. BHD. (1117204-T)

167, Jalan Nilai 3/16, Kawasan Perindustrian Nilai 3,
71800, Nilai, Negeri Sembilan,
Tel ; 606-790 9222 Malaysia

Email address : enquiry@vivasil.com Website : www.vivasil.com

Facebook: www.facebook.com/vivasilpaints

